

SELF LEVELLING STAIRS

STAIRS & RAMPS

PRODUCT NAME	HEIGHT RANGE (MIN – MAX)	WIDTH	HANDRAIL HEIGHT	STEPS	LOAD RATING	APPROX. WEIGHT
SLS 650X6STEPS	600 – 1400 mm	650 mm	1000 mm	6	2.5 KPA	60 KG
SLS 650X9STEPS	1290 – 2100 mm	650 mm	1000 mm	9	2.5 KPA	85 KG
SLS 650X12STEPS	1800 – 2750 mm	650 mm	1000 mm	12	2.5 KPA	110 KG
SLS 650X15STEPS	2600 – 3400 mm	650 mm	1000 mm	15	450 KG	130 KG
SLS 650X18STEPS	3300 – 4100 mm	650 mm	1000 mm	18	450 KG	155 KG
SLS 1200X6STEPS	600 – 1400 mm	1200 mm	1000 mm	6	2.5 KPA	80 KG
SLS 1200X9STEPS	1290 – 2100 mm	1200 mm	1000 mm	9	2.5 KPA	110 KG
SLS 1200X12STEPS	1800 – 2750 mm	1200 mm	1000 mm	12	2.5 KPA	140 KG
SLS 1200X15STEPS	2600 – 3400 mm	1200 mm	1000 mm	15	450 KG	170 KG
SLS 1200X18STEPS	3300 – 4100 mm	1200 mm	1000 mm	18	450 KG	205 KG

STAR SELF LEVELLING STAIRS ARE ENGINEERED TEMPORARY ACCESS SOLUTIONS DESIGNED TO PROVIDE SAFE AND STABLE STAIR ACCESS ACROSS MULTIPLE WORKING HEIGHTS AND UNEVEN GROUND CONDITIONS.

AVAILABLE IN 650 MM SINGLE-WIDTH OR 1200 MM DOUBLE-WIDTH CONFIGURATIONS TO SUIT VARYING TRAFFIC VOLUMES AND OPERATIONAL REQUIREMENTS.

ALUMINIUM STAIR TREADS WITH HIGH-VISIBILITY YELLOW ANTI-SLIP NOSING DELIVER SECURE FOOTING AND IMPROVED EDGE AWARENESS DURING ASCENT AND DESCENT.


POWDER-COATED HANDRAILS AND REMOVABLE GUARDRAIL CONFIGURATIONS PROVIDE CONTINUOUS EDGE PROTECTION WHILE ALLOWING FLEXIBILITY FOR TRANSPORT AND POSITIONING.

INTEGRATED CRANE LIFTING POINTS AND FORKLIFT POCKETS ENABLE EFFICIENT RELOCATION BETWEEN WORK AREAS AND SITES.

OPTIONAL LANDING PLATFORMS PROVIDE STABLE WORKING AREAS AT HEIGHT, IMPROVING SAFETY DURING TRANSITIONS BETWEEN STAIRS AND ELEVATED WORK ZONES.

EACH UNIT IS SUPPLIED WITH UP TO 2.5 KPA / 450 KG LOAD RATING AND AN OH&S INSPECTION PLAN TO SUPPORT SITE COMPLIANCE.

BACKED BY A LIFETIME STRUCTURAL WARRANTY, ENSURING LONG-TERM RELIABILITY AND COMPLIANCE ACROSS CONSTRUCTION AND MAINTENANCE APPLICATIONS.

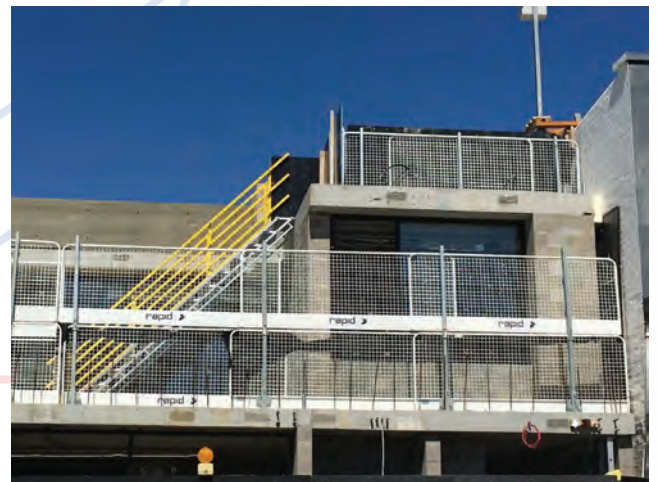

AUSTRALIAN
OWNED & OPERATED

27+ YEARS IN
BUSINESS

STRUCTURAL
LIFETIME WARRANTY

MANUFACTURED
TO AS/NZS STANDARDS

CUSTOM DESIGN
AVAILABLE



SELF LEVELLING STAIRS

STAIRS & RAMPS



37 - 45 ° ANGLE STAIR PLATFORMS

Allows the staircase to be adjusted to various angles and heights to suit different access points on site.



ANTI-SLIP BULL NOSING

High-visibility yellow nosing provides clear edge awareness and a textured surface for maximum grip during ascent and descent.



REMOVABLE HANDRAILS

Powder-coated rail configurations can be easily detached or reconfigured to provide flexibility during transport and site positioning.




65 MM ANTI SLIP TREADS

Aluminium stair treads with high-visibility bull nosing provide secure footing during operations.



LIFTING POINTS

Integrated lifting points enable safe relocation between work areas and sites.



1200 MM ANTI SLIP TREADS

Aluminium stair treads with high-visibility bull nosing provide secure footing during operations.



BUILT TO GROUND FEET

Heavy-duty base plates allow for secure anchoring to the ground, providing a stable connection for fixed access points.

OPTIONAL




LANDING PLATFORMS



POWDER COATING



D BUMPERS



FITTED COMPLIANCE PLATE

Supports WHS requirements and site compliance.